


# OMNIKEY® 5127CK Reader Board

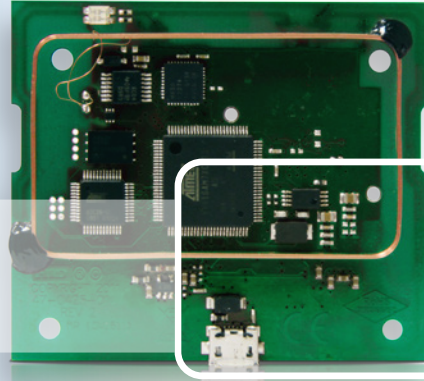

## EMBEDDED CCID AND KEYBOARD WEDGE RFID READER BOARD

- **CCID Support** – Eliminates the requirement to install drivers on standard operating systems
- **Keyboard Wedge Support** – Retrieves data from a card and forwards the information directly to an application by emulating keyboard strokes
- **Rapid and Easy Integration** – Developer Tool Kit allows rapid and easy integration of the reader board
- **Dual Frequency** – Allows straightforward migration by simultaneously supporting low and high frequency credentials, including HID Prox®, Indala®, iCLASS® Seos®, iCLASS Elite®, and other SIO-enabled credentials

HID Global's OMNIKEY® 5127CK reader board opens new market opportunities for system integrators seeking simple integration and development of readers using standard interfaces such as CCID (Circuit Card Interface Device). This built-in feature enables integrators to design finished readers without needing to install or maintain drivers, eliminating complex software lifecycle management issues in the field and accelerating introduction of finished devices in the market. These devices are commonly used in printers, copiers, vending machines and access control systems.

With the keyboard wedge functionality, users of OMNIKEY 5127CK readers can retrieve data from a card that is presented to the reader and directly input the card data into an application using keystroke emulation. This eliminates the need for customers to manually enter the card data into an application.

The OMNIKEY 5127CK reader board offers the market proven OMNIKEY reader feature set, supporting low and high frequency technology

within a single device that enables credential migration projects to disburden the environment in mixed credential technology scenarios.

Key features of the OMNIKEY 5127CK reader board include support for the most common low and high frequency card technologies, including HID Prox, Indala and EM Prox, iCLASS Seos, iCLASS Elite, and other SIO-enabled credentials. It also includes an integrated management tool that enables field updates to readers for new firmware or changing configuration settings.

For quick and easy integration, HID Global provides a Developer Tool Kit (DTK) for the OMNIKEY 5127CK reader board. The DTK provides the necessary tools, documentation and developer resources material to shorten integration cycles and speed time to market with finished products.

**FEATURES:**

**CCID Support**

- Native CCID implementation supporting Windows®, LINUX® and Mac® operating systems

**Keyboard Wedge**

- Fully configurable and programmable keyboard wedge functionality featuring an integrated management console
- Flexible configuration of data structures and output modes
- Human Interface Device (HID) protocol allows reader configuration through host in keyboard Wedge mode

- Extended keyboard boot option for devices with limited USB device handling capabilities

**Broad Credential Support**

- Dual frequency functionality allowing support for both low and high frequency credentials simultaneously
- iCLASS®, iCLASS SE®, HID Prox®, Indala® & EM Prox, MIFARE® Classic, MIFARE® DESFire® EV1, iCLASS® Seos®, iCLASS Elite®, and other SIO-enabled credentials.

**Enhanced Lifecycle Management**


- Easy firmware updates and configuration setting by utilizing a Web interface and SNMP messages

**OK 5127CK Developer Toolkit (DTK)**

- Provides a complete set of tools and resources for immediate development
- Includes a reader, sample cards and documentation to accelerate the development process and to accelerate time to market with finished products.

**Expanded ecosystem of Genuine HID® solutions**

- Enables developers to easily bring embedded solutions to market and become part of the Genuine HID technology ecosystem.

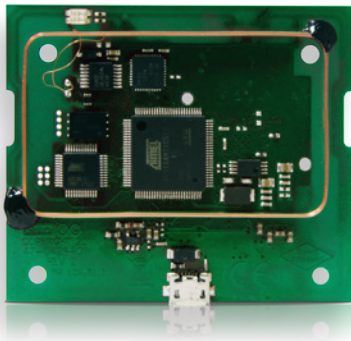

[hidglobal.com](http://hidglobal.com)

Learn about Genuine HID's Green by Design @ [hidglobal.com/green](http://hidglobal.com/green)

North America: +1 512 776 9000  
 Toll Free: 1 800 237 7769  
 Europe, Middle East, Africa: +44 1440 714 850  
 Asia Pacific: +852 3160 9800  
 Latin America: +52 55 5081 1650

© 2013-2014 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, the Chain Design, iCLASS, iCLASS SE, iCLASS Elite, Indala, HID Prox, Genuine HID, Seos and OMNIKEY are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.  
 2014-05-27-omnikey-5127-ck-reader-board-ds-en  
 PLT-00349

**SPECIFICATIONS**

<b>Base Model Number</b>	OMNIKEY® 5127 CK, R51270001-1	
<b>Dimensions</b>	2.6" x 2.2" x 0.35" (66 mm x 55 mm x 9 mm )	
<b>Weight</b>	Approx. 0.49oz (14 g)	
<b>Power Supply</b>	Bus powered	
<b>Current Requirements</b>	With Credential in the field: 170mA No Credential in the field: 80mA Standby (Sleep Current): 890µA	
<b>Operating Temperature</b>	32° - 122° F (0° - 50° C)	
<b>Operating Humidity</b>	10 - 90% Relative Humidity	
<b>Storage Temperature</b>	-4° - 149° F (-20° - 65° C)	
<b>Current Requirements</b>	With Credential in the field: 170mA No Credential in the field: 80mA Standby (Sleep Current): 890µA	
<b>HOST INTERFACE</b>		
<b>Host Interface</b>	USB 2.0 (also compliant with USB 1.1)	
<b>Transmission Speed</b>	12 Mbps (USB 2.0 full speed)	
<b>CONTACTLESS SMART CARD INTERFACE</b>		
	<b>CCID</b>	<b>Keyboard Wedge</b>
<b>Cards &amp; Protocols High Frequency</b>	MIFARE® Classic 1K / 4K, Ultra Light, Ultra Light C, Plus, MIFARE DESFire 0.6, MIFARE DESFire EV1, iCLASS, iCLASS SE, T=CL, ISO 14443 A with up to 848 kbps transmission rate (depending on card), ISO 15693 with up to 26 kbps transmission rate (depending on card), iCLASS Seos	MIFARE® Classic 1K / 4K, Ultra Light, Ultra Light C, Plus (Security Lvl 1), MIFARE DESFire 0.6, MIFARE DESFire EV1, iCLASS, iCLASS SE, iCLASS Seos , CEPAS (CAN), ISO14443B (CSN)
<b>Cards &amp; Protocols Low Frequency</b>	HID Prox, HID Indala Prox, EM Prox, AWiD Prox	
<b>Supported APIs</b>	PC/SC (ready for 2.01, in CCID mode), Human Interface Device (in Keyboard Wedge Mode)	
<b>Driver Support</b>	Compliant with native Human Interface Drivers (in Keyboard Wedge Mode) Compliant with native CCID drivers (in CCID mode) HID proprietary PC/SC drivers available for Windows® XP, Vista™, 7 2008 R2 (all 32 bit/64 bit), HID proprietary drivers available for Linux® operating systems (32/64bit): Debian 6.0, Fedora 15, OpenSUSE 11.4 , Ubuntu 11.04, Mac® OSX 10.5/10.6/10.7	
<b>Status Indicator</b>	Dual color LED (green=ready, red=busy) Buzzer (programmable)	
<b>Connector Cable</b>	Micro USB connector (cable not included)	
<b>Approvals / Environmental</b>	Compliant to ROHS/REACH, WEEE, IEC 60950-1, CE, FCC Modular, IC (Canada)	
<b>Warranty</b>	6 months manufacturer's warranty	

<sup>1</sup>424 kbps default data rate, 848 kbps configurable through web interface